

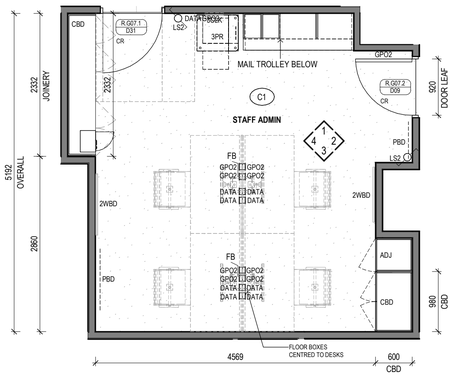



1 VILLAGE ADMIN - ADMIN
Scale 1 : 50

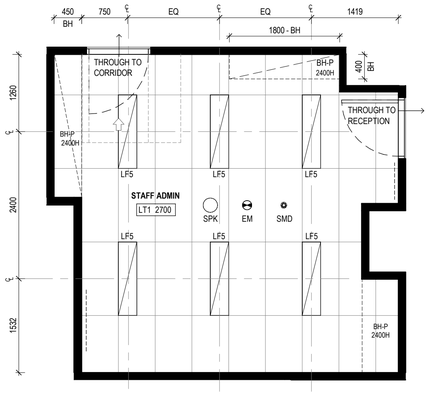


2 RCP - VILLAGE ADMIN - ADMIN
Scale 1 : 50

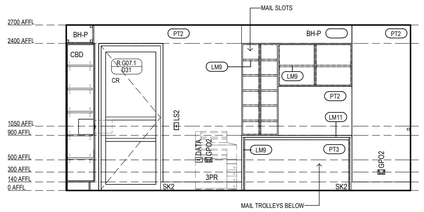


VILLAGE ADMIN - ADMIN
ELEVATION 1
Scale 1 : 50

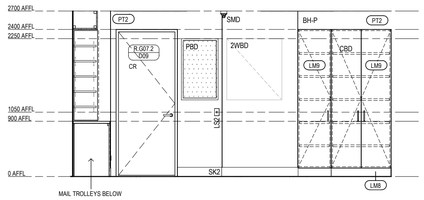

VILLAGE ADMIN - ADMIN
ELEVATION 2
Scale 1 : 50

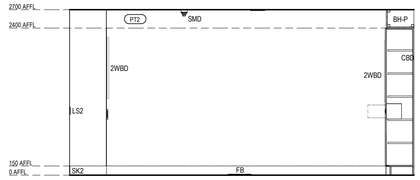

VILLAGE ADMIN - ADMIN
ELEVATION 3
Scale 1 : 50

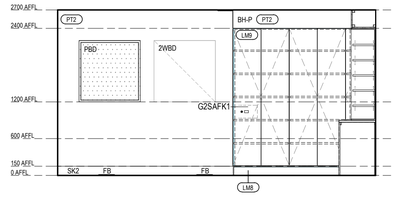

VILLAGE ADMIN - ADMIN
ELEVATION 4
Scale 1 : 50

Legend - Internal Elevations

DRAWINGS TO BE READ IN CONJUCTION WITH ARCHITECTURAL SPECIFICATION & MATERIALS, PRODUCTS & FINISHES SCHEDULE.

PT# PAINT FINISH TO ALL WALLS WITHIN NEW & AFFECTED ROOMS/ AREAS UNLESS OTHERWISE SHOWN

CSE	CONCRETE SEALER
DPR	DOOR PROTECTION
GD	GRAPHIC FILM
LM	LAMINATE
MI	MIRROR
PBD	PINBOARD
PT	PAINT FINISH
REN	RENDER FINISH
SB	SPLASHBACK
ST	STONE
WB	WHITEBOARD
WP	WALL PROTECTION
WT	WALL TILE
WV	WALL VINYL

NOTES:
1. LAMINATE CARCASS FOR ALL VISIBLE OPEN SHELVING, UNLESS OTHERWISE NOTED
2. MELAMINETO ALL INTERNAL CARCASS OF JOINERY, UNLESS OTHERWISE NOTED.

Legend - Floor Finishes

C	CARPET
CO	CONCRETE
E	EPOXY FINISH
L	LINOLEUM
M	MATTING
PU	PAVING UNIT - TBC WITH LANDSCAPE
R	RUBBER FLOORING
T	TILING
TF	TIMBER FLOORING
V	VINYL
LVT	LUXURY VINYL TILE PLANK

PROTECTION RAILS OR CRASH RAILS - REFER TO MATERIAL SCHEDULE FOR DETAILS

WL1- REFER TO MATERIAL SCHEDULE FOR DETAILS


WL2 - REFER TO MATERIAL SCHEDULE FOR DETAILS

NOTE:


FALLS TO ALL FLOOR WASTES IN ACCORDANCE WITH AS 3740.

Keynote Legend


2WBD	WHITEBOARD - GROUP 2
3CLK	CLOCK - GROUP 3
3CTP	CURTAINS - GROUP 3
3PR	PRINTER - GROUP 3
3TBCO	COFFEE TABLE - GROUP 3
3TV(M)	TELEVISION SCREEN 55 INCH - GROUP 3
ADJ	ADJUSTABLE SHELF
BH-P	BULKHEAD - PLASTERBOARD TYPE
CAM	CCTV CAMERA
CBD	CUPBOARD
DATA	DATA OUTLET
DR	DRAWER
EM	EMERGENCY LIGHT
FB	FLOOR BOX
FE-JC	FIRE EXTINGUISHER IN JOINERY CUPBOARD
G2SAFK1	
GPO2	POWER OUTLET - DOUBLE
HDMI	HDMI OUTLET
LF1	LIGHT FITTING - REFER TO ELECTRICAL ENGINEER SPECIFICATION
LF3	LIGHT FITTING - TYPE 3
LF5	LIGHT FITTING - TYPE 5
LO1	LOCKER - TYPE 1
LS	LIGHT SWITCH
LS2	LIGHT SWITCH - TWO WAY
OH	OVERHEAD CUPBOARD/SHELVING
P1	TOILET PAN TYPE 01
PBD	PINBOARD - FRAMED
S2	SINK - TYPE 2
SH	SHELF
SK2	SKIRTING - TYPE 2
SMD	SMOKE DETECTOR
SPK	ANUNCIATOR

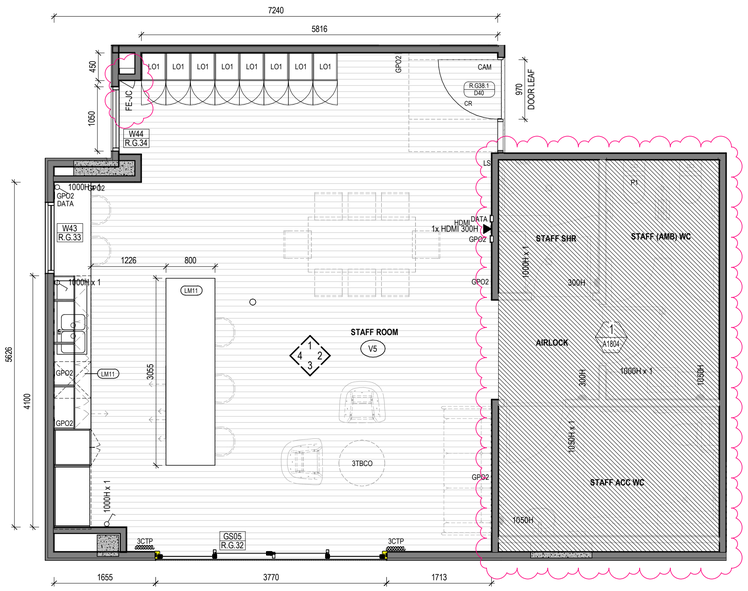


3 VILLAGE ADMIN - STAFF ROOM & AMENITIES
Scale 1 : 50

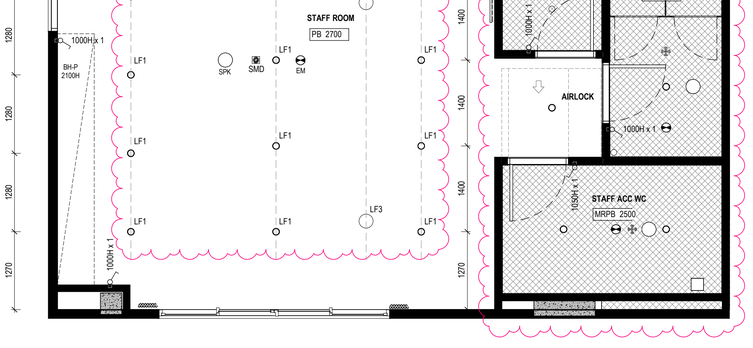


4 A1400 RCP - VILLAGE ADMIN - STAFF ROOM & AMENITIES
Scale 1 : 50

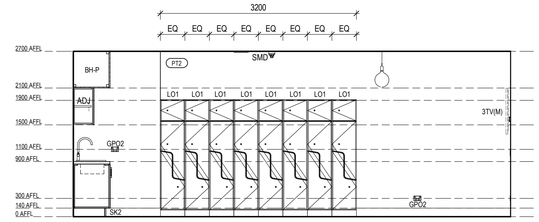


VILLAGE ADMIN - STAFF ROOM & AMENITIES
ELEVATION 1
Scale 1 : 50

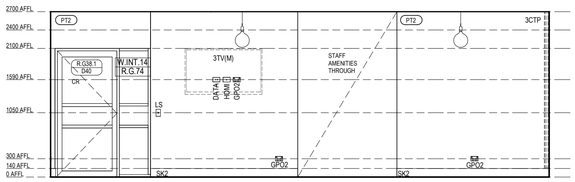

VILLAGE ADMIN - STAFF ROOM & AMENITIES
ELEVATION 2
Scale 1 : 50

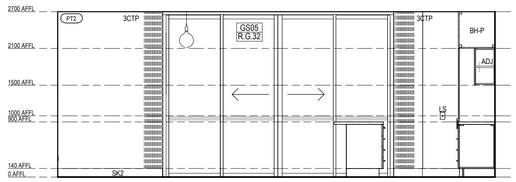

VILLAGE ADMIN - STAFF ROOM & AMENITIES
ELEVATION 3
Scale 1 : 50

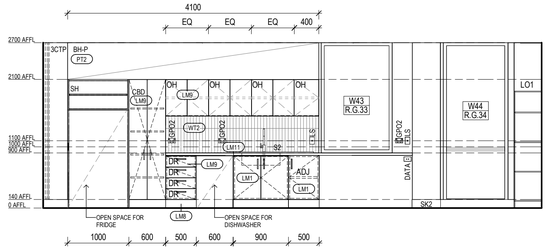

VILLAGE ADMIN - STAFF ROOM & AMENITIES
ELEVATION 4
Scale 1 : 50

FOR CONSTRUCTION

Revision/Issue		Date
P1	Preliminary Internal Elevations - RACF	2025.08.08
P2	Consolidated Set-to-date / SMG Comments	2025.08.15
P3	Tender Pack Issue	2025.09.05
P4	ISSUE FOR CONTRACT	2025.10.10
C1	ISSUE FOR CONSTRUCTION - INTERIORS	2026.03.26

ClarkeHopkinsClarke

Melbourne | Wurundjeri
L9, Melbourne Connect
700 Swanston Street
Carlton VIC 3053
Telephone (03) 9419 4340
Email studio@chc.com.au
www.chc.com.au

Sydney | Gadigal Country
Suite 3, Ground Floor
91 Campbell Street
Surry Hills NSW 2010
Telephone (02) 9221 9200
Email studio@chc.com.au
www.chc.com.au

Scale	1 : 50 @ A1
Date	01/03/2024
Drawn	EL / DP
Architect	EL

Project
Summerset Oakleigh
52 Golf Road, Oakleigh South, VIC

Drawing
Internal Elevations - Village Admin - Admin and Staff

Drawing No.
230185/A1803 C1

A1 Use figured dimensions in preference to scale. Verify dimensions at job before shop fabrication. Read drawing in conjunction with specification.

© ClarkeHopkinsClarke